

# Quectel UG96

## Compact UMTS/HSPA Module



UG96 is a penta-band UMTS/HSPA module offering a maximum data rate of 7.2Mbps downlink and 5.76Mbps uplink. With the outstanding feature of fully pin-to-pin compatibility with Quectel UMTS/HSPA UG95 and GSM/GPRS M95 modules, it supports GSM/GPRS/EDGE and UMTS/HSPA/HSUPA networks, which enables integrators and developers to design their applications once and truly benefit from the flexibility of worldwide coverage and service afforded by the combination of the two most prevalent cellular technologies worldwide.

With a cost-effective SMT form factor of 22.5mm × 26.5mm × 2.2mm and high integration level, UG96 enables integrators and developers to easily design their applications and take advantage from the module's low power consumption and mechanical intensity. Its advanced LGA package allows fully automated manufacturing for high-volume applications.

A rich set of Internet protocols, industry-standard interfaces (USB/UART/I2C/Status Indicator/PCM) and abundant functionalities (USB drivers for Windows XP, Windows Vista, Windows 7/8/8.1/10, Linux, Android/eCall\*) extend the applicability of the module to a wide range of M2M applications such as wireless POS, smart metering, telematics, security, industrial PDA/PC and tablet.



### Key Benefits

- ✓ Worldwide UMTS/HSPA and GSM/GPRS/EDGE coverage
- ✓ Compact SMT form factor ideal for size-constrained applications
- ✓ Easy drop-in migration to GSM/GPRS module
- ✓ Super slim profile in LGA package
- ✓ High-quality data and image transmission even in harsh environment
- ✓ Fast time-to-market: reference designs, evaluation tools and timely technical support minimize design-in time and development efforts
- ✓ Robust mounting and interfaces



Multi-band for UMTS & GSM



HSDPA 7.2Mbps  
HSUPA 5.76Mbps



LGA Package



Embedded Abundant Protocols



eCall \*



Compact Size




USB 2.0 High Speed Interface



DFOTA



Audio (Optional)



GPRS/EDGE Multi-slot Class 33




USB Drivers



Quectel Enhanced AT Commands

# Quectel UG96

## Compact UMTS/HSPA Module

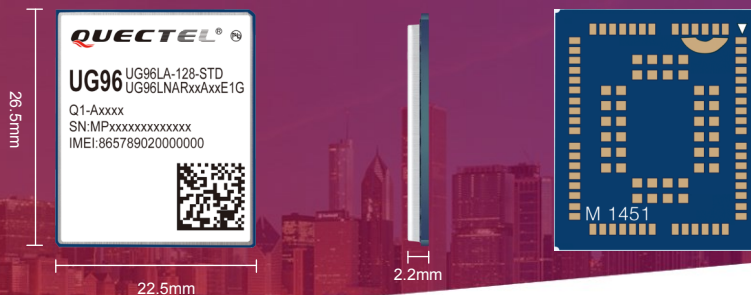

### Variant for the Global

800/850/900/1900/2100MHz @UMTS  
850/900/1800/1900MHz @GSM

### Data

HSUPA: Max. 5.76Mbps  
HSDPA: Max. 7.2Mbps  
UMTS: Max. 384Kbps (DL), Max. 384Kbps (UL)  
EDGE: Max.296Kbps (DL), Max 236.8kbps (UL)  
GPRS: Max. 107Kbps (DL), Max. 85.6Kbps (UL)  
CSD: 14.4 Kbps

### Voice

Speech Codec Modes:  
HR, FR, EFR, AMR, AMR-WB  
Echo Arithmetic:  
Echo Cancellation, Noise Reduction

### SMS

Point-to-point MO and MT  
SMS Cell Broadcast  
Text and PDU Mode

### Interfaces

USB 2.0 with High Speed up to 480Mbps  
UART  
Digital Audio through PCM Interface (Optional)  
1.8V/ 3.0V (U)SIM Card Interface  
I2C  
NETLIGHT for Network Status Indication  
STATUS for Power ON/OFF Status Indication

### Enhanced Features

eCall \*  
Firmware Update:  
via USB or UART Interface

### DFOTA:

Delta Firmware Upgrade over the Air

### RAMFile:

RAM File System Access and Management

### Electrical Characteristics

#### Output Power:

Class 3 (24dBm +1/-3dB) for UMTS bands  
Class E2 (27dBm±3dB) for GSM850 & EGSM900  
Class E2 (26dBm±3dB) for DCS1800 & PCS1900  
Class 4 (33dBm ±2dB) for GSM 850/900  
Class 1 (30dBm ±2dB) for GSM 1800/1900

#### Consumption:

50µA @power off  
1.1mA @GSM sleep, DRX=9  
1.7mA @UMTS sleep, DRX=9  
240mA @GSM voice, max power  
490mA @UMTS voice, max power  
520mA @GPRS data, max power  
500mA @EDGE data, max power  
580mA @HSDPA, max power  
540mA @HSUPA, max power

#### Sensitivity:

-110dBm @UMTS 800/850/900/2100  
-109.5dBm @UMTS 1900  
-109.5dBm @GSM 850  
-108.5dBm @EGSM 900  
-110dBm @DCS 1800  
-108dBm @PCS 1900

### Software Features

#### USB Driver:

Windows XP/Vista/7/8/8.1/10,  
Linux 2.6/3.x/4.1, Android 4.x/5.x/6.0

#### RIL Driver:

Android 4.x/5.x/6.0

### Protocols:

TCP/UDP/PPP/MMS/HTTP/HTTPS/SMTP/  
SMTPS/FTP/NTP/NITZ/PING/SSL

### General Features

Extended Temperature: -40°C ~ +85°C  
Dimensions: 22.5mm × 26.5mm × 2.2mm  
Approx. 3.1g  
Supply Voltage: 3.3V~4.3V, 3.8V Typ.  
HSUPA: Release 7 (Category 6)  
HSDPA: Release 7 (Category 8)  
EDGE: Multi-slot Class 33  
GPRS: Multi-slot Class 33  
UMTS: Release 99/7  
GSM: Release 99/4  
3GPP TS 27.007, 3GPP TS 27.005 and Quectel  
Enhanced AT Commands

### Approvals

RoHS Compliant  
CE/GCF (Europe)  
DoC (Russia)  
FCC/PTCRB (North America)  
RCM (Australia)  
IFETEL/Movistar (Mexico)  
ICASA (South Africa)  
JATE/TELEC (Japan)  
Anatel (Brazil)  
Telefonica (Global)

\* Under Development